

NOTICE TO MARINERS



DOGGER BANK OFFSHORE WIND FARM

DATE OF ISSUE:	28/07/2023
NOTICE TO MARINER NUMBER	LF500013-IAC-DOG-NOT-0004 Rev 03

Dogger Bank A IAC Pre-Lay Grapnel Run (PLGR)

LOCATION DESCRIPTION		Dogger Bank A Offshore Windfarm
COORDINATES WGS 84	DBA OWF	See Table 1 below
START DATE/TIME		9/08/2023
END DATE/TIME		20/08/2023

Description of Hazard/Operation

The Multifunctional Anchor Handling Tug (AHT) with DP1, **PACIFIC DISPATCH**, will perform the third campaign of the Pre-Lay Grapnel Run operations in Dogger Bank A OWF Inter Array Cable Array Area.

This campaign will commence on the 9th of August 2023 and continue until approximately 20th of August 2023. The works will be continuous, 24 hours a day. Charts of the DBA array area are provided below.

The operations include a single pre-lay grapnel run over the centre of part of the array cable routes prior to IAC installation by means of a grapnel train to mitigate the risk of encountering subsea obstructions such as discarded fishing gear, wires, etc.

During operations, the **PACIFIC DISPATCH** will be restricted in its ability to manoeuvre as defined under COLREGs (International Regulations for Preventing Collisions at Sea 1972) and will display the appropriate day shapes and lights. The vessel will also transmit an Automatic Identification System (AIS) message.

It is requested that all vessels maintain a minimum of 1.5Nm separation distance from the AHT and pass at reduced speed. Fishing gear or other equipment with seabed intervention should not be deployed when approaching the working corridor.

Contact Details

Marine Coordination Contact	Duty Marine Coordinator Tel: +44 (0) 7586 332078 gm_dbmcc@equinor.com
Fisheries Liaison Officer (FLO) CONTACT	Alex Winrow-Giffin, Brown & May Marine Ltd Alex@brownmay.com Tel: 01379 870181 Mob: 07760 160039 Zoë Lawrence - Brown & May Marine Ltd zoe@brownmay.com Mob: 07923 138175
Vessel Shore Contact	Bart van Dun (DEME HSE Manager) Mobile: +31 6 38 68 59 48 Email: BAVD@deme-group.com

NOTICE TO MARINERS

DOGGER BANK WIND FARM

Supporting Information


Vessel – PACIFIC DISPATCH	Contact Details	
	Call Sign	9VFW6
	MMSI / IMO	564652000 / 9456214
	Vessel Details	
	Length / Beam	92M / 22.00M
	Draft	Operating 7.3M
Vessel Contact	V-sat: +1 757 734 5621 Mobile: +44 776 938 6734 Email bridge: PACIFIC.DISPATCH@TDW.COM	

Table1: Coordinates for DBA Construction area

COORDINATES WGS 84	DBA IAC array area	Latitude	Longitude
		54°39.557'N	001°58.617'E
		54°44.501'N	001°37.973'E
		54°50.114'N	001°38.014'E
		54°50.305'N	002°10.464'E
		54°48.522'N	002°13.640'E
		54°39.557'N	001°58.617'E

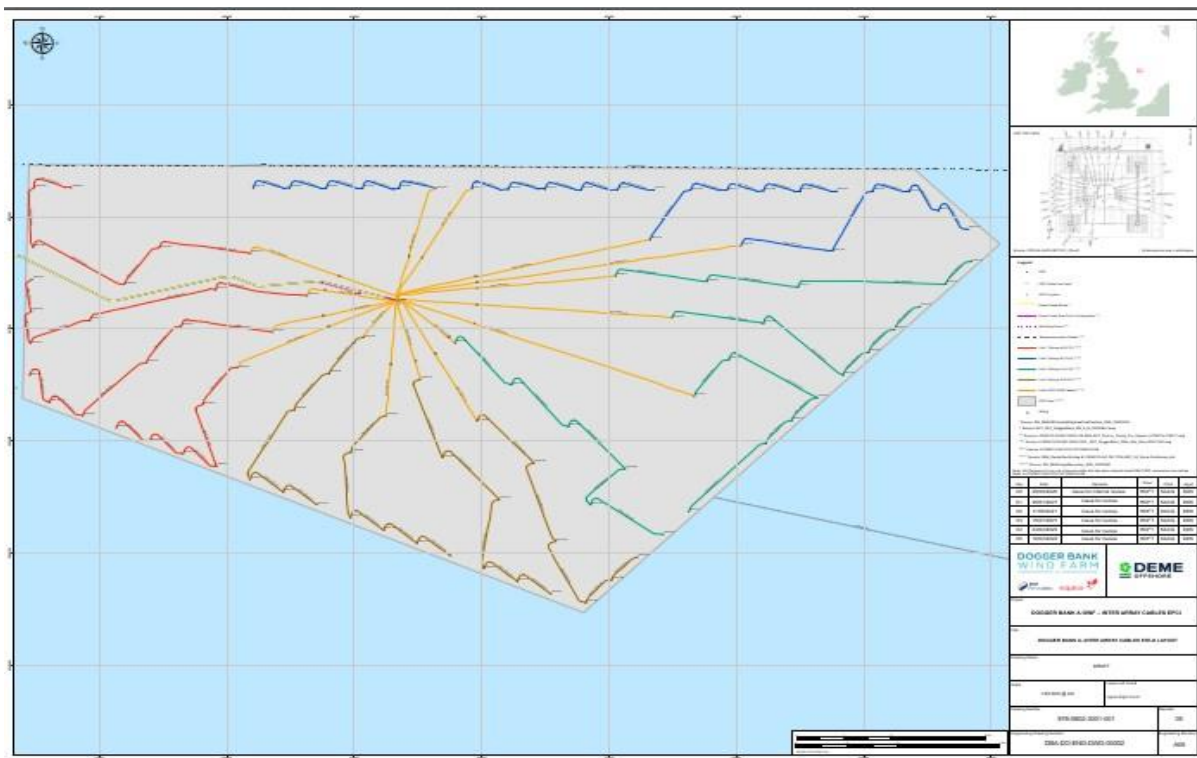


Figure 1: Fig 1 Dogger Bank A OWF IA Cable Layout