

NOTICE TO MARINERS



DOGGER BANK OFFSHORE WIND FARM

DATE OF ISSUE:	12/11/2023
NOTICE TO MARINER NUMBER	LF700013-ESI-DOG-NOT-0004

Dogger Bank C: Trenching Trial Operations

LOCATION DESCRIPTION	Dogger Bank C Offshore Windfarm, Export Cable Corridor		
COORDINATES	DBC Export Cable Corridor	See Table 1 below	
START DATE/TIME	26/11/2023		
END DATE/TIME	19/12/2023		

Description of Hazard/Operation

The cable laying vessel, **NKT Victoria**, will perform trenching trial operations between KP103 – KP105, KP108.975 - KP111.575 and KP132.500 - KP137.450 approximately.

The trenching trials will commence on the 26 November for approx. 3 weeks. The work will be continuous, 24 hours a day. Coordinates and chart of the location are provided below.

At each trial location, the proposed sequence of activities includes:

- Pre-Lay Survey of selected site;
- Demonstration of cable burial;
- As-Buried Survey; and
- Recover cable back to NKT Victoria.

All equipment used for the trials will be removed upon completion of the test.

During operations the NKT Victoria will be restricted in its ability to manoeuvre as defined under COLREGs (International Regulations for Preventing Collisions at Sea 1972) and will display the appropriate day shapes and lights. The vessel will also transmit an Automatic Identification System (AIS) message.

It is requested that all vessels maintain a minimum of 1.5Nm separation distance from NKT Victoria and pass at reduced speed. Fishing gear or other equipment with seabed intervention should not be deployed when approaching the working area.

An Offshore Fisheries Liaison Officer will be onboard NKT Victoria to provide support and coordination to fishing vessels, please see contact details below.

NOTICE TO MARINERS

Contact Details

Marine Coordination Contact	Duty Marine Coordinator Gm_dbmcc@equinor.com Tel: +44 (0) 7586 332078
Fisheries Liaison Officer (FLO) CONTACT	Alex Winrow-Giffin, Brown & May Marine Ltd Alex@brownmay.com Tel: 01379 870181 Mob: 07760 160039 Zoë Lawrence - Brown & May Marine Ltd zoe@brownmay.com Mob: 07923 138175
Offshore Fisheries Liaison Officer (OFLO)	Chris Williams Mobile: +44 7707 770571 Email: willc2814@gmail.com
Vessel Shore Contact	Dave Holroyde Mobile: +44 7876 272527 Email: dholroyde@caydaleconsulting.co.uk

Supporting Information


Vessel – NKT Victoria	Contact Details	
	Call Sign	LAWV7
	MMSI	257016000
	IMO	9791016
	Vessel Details	
	Length	140M
	Beam	29.6M
	Draft	Summer draft 8,0M
	Vessel Contact	V-sat: +47 22 40 81 10 Mobile: +47 46 18 51 45

Table 1 Coordinates of the trenching trial areas - Please note: The coordinates presented below represent a simplified line along the cable route. The extent of the planned working area for the trenching trials is +/-500m either side of the simplified line, this is expected to account for turning radius etc.

ID	Degrees Decimal Minutes (WGS 84)	
	Latitude	Longitude
Trenching Trial Location A	54° 47.636'N	00° 34.106'E
	54° 47.671'N	00° 37.452'E
Trenching Trial Location B	54° 50.155'N	00° 55.730'E
	54° 50.592'N	01° 01.091'E
Trenching Trial Location C	54° 47.624'N	00° 30.941'E
	54° 47.366'N	00° 28.684'E


NOTICE TO MARINERS

DOGGER BANK WIND FARM

ID	Degrees Decimal Minutes (WGS 84)	
	Latitude	Longitude
	54° 47.231'N	00° 27.565'E

NOTICE TO MARINERS

DOGGER BANK WIND FARM

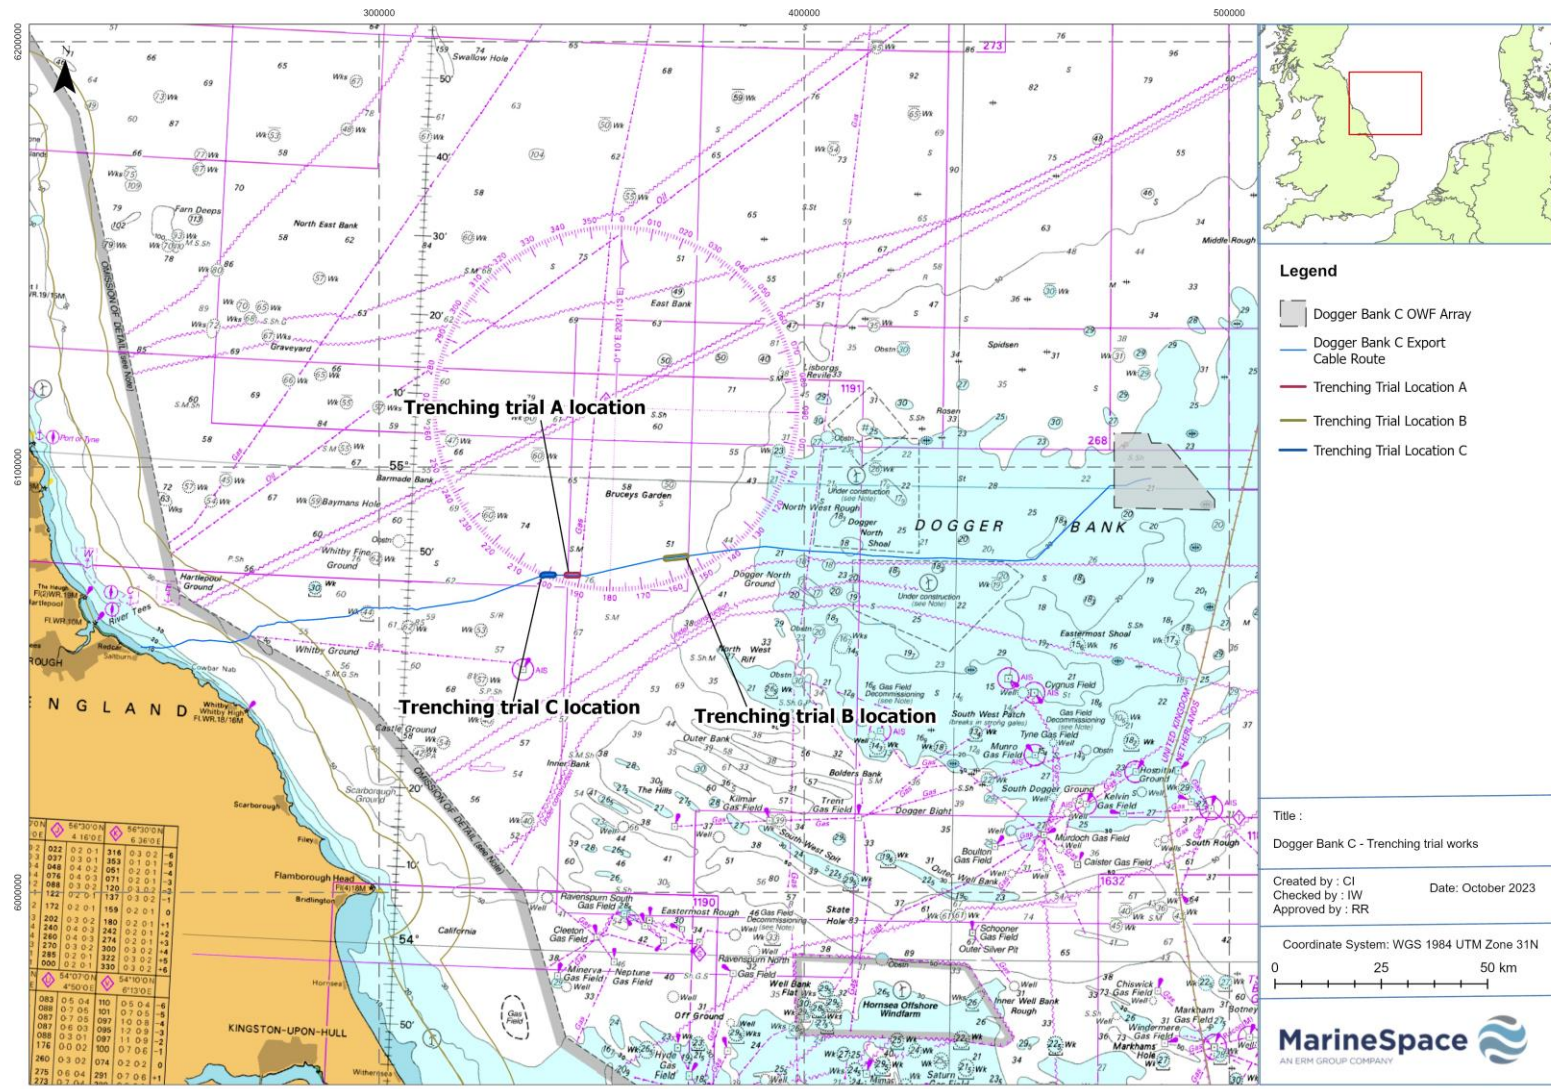

Service Layer Credits: © Crown copyright and database rights 2023. For information purposes only and not to be used for navigation.

Figure 1: Trenching Trial Locations