

NOTICE TO MARINERS



DOGGER BANK OFFSHORE WIND FARM

DATE OF ISSUE:	26/02/2024
NOTICE TO MARINER NUMBER	LF500013-IAC-DOG-NOT-0010

Dogger Bank A IAC Pre-Lay Grapnel Run (PLGR)

LOCATION DESCRIPTION		Dogger Bank A Offshore Windfarm
COORDINATES WGS 84	DBA OWF	See Table 1 below
START DATE/TIME		01/03/2024
END DATE/TIME		07/03/2024

Description of Hazard/Operation

The Multifunctional Anchor Handling Tug (AHT) with DP2, **SOVEREIGN**, will perform the fourth campaign of the Pre-Lay Grapnel Run operations in Dogger Bank A OWF Inter Array Cable Array Area.

This campaign will commence on the 1st of March 2024 and continue until approximately 7th of March 2024. The works will be continuous, 24 hours a day. Charts of the DBA array area are provided below.

The operations include a single pre-lay grapnel run over the centre of part of the array cable routes prior to IAC installation by means of a grapnel train to mitigate the risk of encountering subsea obstructions such as discarded fishing gear, wires, etc.

During operations, the **SOVEREIGN** will be restricted in its ability to manoeuvre as defined under COLREGs (International Regulations for Preventing Collisions at Sea 1972) and will display the appropriate day shapes and lights. The vessel will also transmit an Automatic Identification System (AIS) message.

It is requested that all vessels maintain a minimum of 1.5Nm separation distance from the AHT and pass at reduced speed. Fishing gear or other equipment with seabed intervention should not be deployed when approaching the working corridor.

Contact Details

Marine Coordination Contact	Duty Marine Coordinator Tel: +44 (0) 7586 332078 gm_dbmcc@equinor.com
Fisheries Liaison Officer (FLO) CONTACT	Alex Winrow-Giffin, Brown & May Marine Ltd Alex@brownmay.com Tel: 01379 870181 Mob: 07760 160039 Zoë Lawrence - Brown & May Marine Ltd zoe@brownmay.com Mob: 07923 138175
Vessel Shore Contact	Bart van Dun (DEME HSE Manager) Mobile: +31 6 38 68 59 48 Email: BAVD@deme-group.com

NOTICE TO MARINERS

DOGGER BANK WIND FARM

Supporting Information


Vessel – Sovereign	Contact Details	
	Call Sign	ORQW
	MMSI / IMO	205644000 / 9262742
	Vessel Details	
	Length / Beam	67.40M / 15.50M
	Draft	Operating 7.4M
Vessel Contact	V-sat: +47 23 670 424 Mobile: +31 6 154 003 27 Email bridge: sovereign-bridge@boskalis.com	

Table1: Coordinates for DBA Construction area

COORDINATES WGS 84	DBA IAC array area	Latitude	Longitude
		54°39.557'N	001°58.617'E
		54°44.501'N	001°37.973'E
		54°50.114'N	001°38.014'E
		54°50.305'N	002°10.464'E
		54°48.522'N	002°13.640'E
		54°39.557'N	001°58.617'E

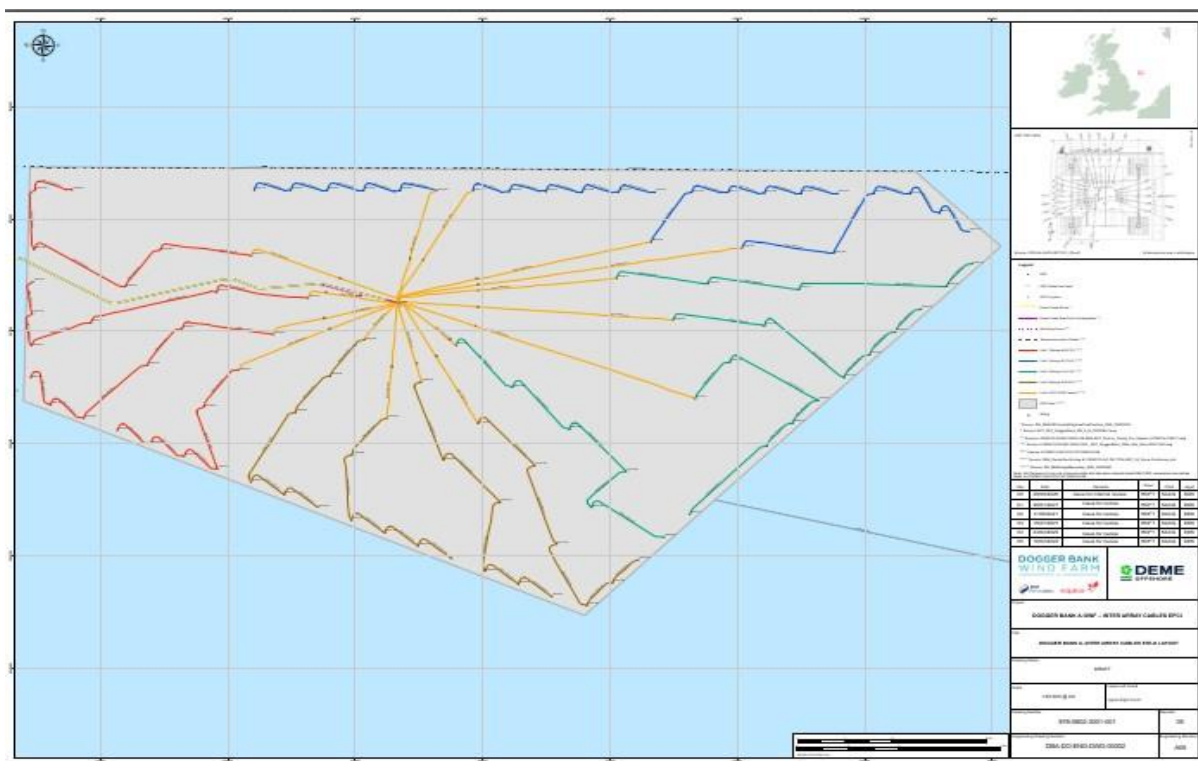


Figure 1: Fig 1 Dogger Bank A OWF IA Cable Layout